


THERMAL TRANSFER RIBBONS

Supported by a full range of ink formulations, you can be confident that your Genuine Printronix Auto ID ribbon will meet the demands of your label printing application. Enjoy consistent, premium quality and optimized performance through your Printronix Auto ID printer.

The Printronix Auto ID range of thermal transfer ribbons:


8000 – ECONOMY WAX

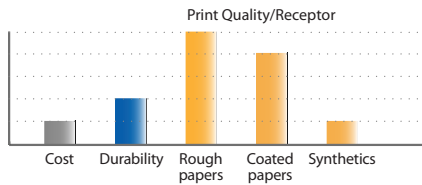

- Our most competitive wax ribbon
- Ideal solution for applications particularly sensitive to the quality/ price ratio
- Compatible with most coated and non-coated paper labels

Part No.	Width	Legnth	Rolls/ctn	Part No.	Width	Legnth	Rolls/ctn
P140082-001	60mm / 2.36"	450m / 1476 ft	6	P140083-001	152.4mm / 6.00"	450m / 1476 ft	6
P140083-001	83mm / 3.27"	450m / 1476 ft	6	P140087-001	165.0mm / 6.50"	450m / 1476 ft	6
P140084-001	110.0mm / 4.33"	450m / 1476 ft	6	P140088-001	171.0mm / 6.73"	450m / 1476 ft	6
P140085-001	130.0mm / 5.12"	450m / 1476 ft	6				


8050 – STANDARD WAX

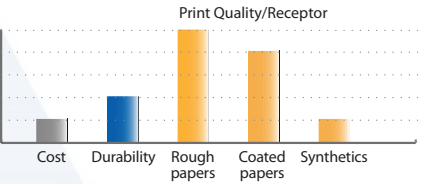

- Widely used for barcode applications
- Provides excellent print quality
- Suitable for standard labeling applications
- Compatible with most coated and non-coated paper labels

Part No.	Width	Legnth	Rolls/ctn	Part No.	Width	Legnth	Rolls/ctn
257672-008	60mm / 2.36"	450m / 1476 ft	6	257672-012	152.4mm / 6.00"	450m / 1476 ft	6
257672-009	83mm / 3.27"	450m / 1476 ft	6	257672-015	165.0mm / 6.50"	450m / 1476 ft	6
257672-010	110.0mm / 4.33"	450m / 1476 ft	6	257672-013	171.0mm / 6.73"	450m / 1476 ft	6
257672-011	130.0mm / 5.12"	450m / 1476 ft	6				


8300 – PREMIUM WIDE SPECTRUM WAX

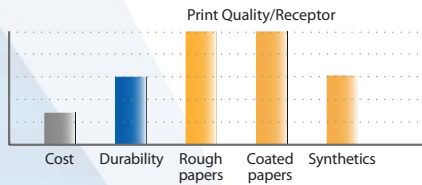

- Resin-enhanced wax
- Best scratch and smudge resistance for a wax ribbon
- Supports high speed printing
- Excellent print quality on all papers and some film materials

Part No.	Width	Legnth	Rolls/ctn	Part No.	Width	Legnth	Rolls/ctn
203484-001	60mm / 2.36"	450m / 1476 ft	6	203484-005	152.4mm / 6.00"	450m / 1476 ft	6
203484-002	83mm / 3.27"	450m / 1476 ft	6	175391-008	165.0mm / 6.50"	450m / 1476 ft	6
203484-003	110.0mm / 4.33"	450m / 1476 ft	6	203484-006	171.0mm / 6.73"	450m / 1476 ft	6
203484-004	130.0mm / 5.12"	450m / 1476 ft	6				


8550 – STANDARD WAX/RESIN

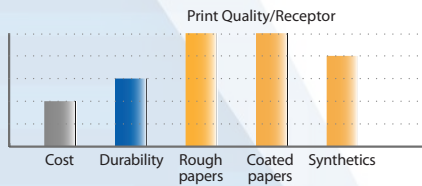

- General purpose wax/resin formulation
- Superior print quality on all common papers and films. Our most versatile formulation
- Prints at low temperatures and high speed

Part No.	Width	Legnth	Rolls/ctn	Part No.	Width	Legnth	Rolls/ctn
203713-001	60mm / 2.36"	450m / 1476 ft	6	203713-005	152.4mm / 6.00"	450m / 1476 ft	6
203713-002	83mm / 3.27"	450m / 1476 ft	6	P140001-001	165.0mm / 6.50"	450m / 1476 ft	6
203713-003	110.0mm / 4.33"	450m / 1476 ft	6	203713-006	171.0mm / 6.73"	450m / 1476 ft	6
203713-004	130.0mm / 5.12"	450m / 1476 ft	6				


8580 – PREMIUM WAX/RESIN

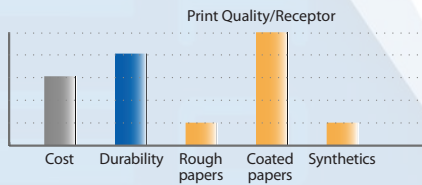

- Designed to print on a wide range of coated papers and films
- Enhanced abrasion and scratch resistance
- Very sharp print quality, enabling ladder and rotated barcode printing simultaneously

Part No.	Width	Legnth	Rolls/ctn	Part No.	Width	Legnth	Rolls/ctn
250758-501	60mm / 2.36"	450m / 1476 ft	6	250758-505	152.4mm / 6.00"	450m / 1476 ft	6
250758-502	83mm / 3.27"	450m / 1476 ft	6	P140002-001	165.0mm / 6.50"	450m / 1476 ft	6
250758-503	110.0mm / 4.33"	450m / 1476 ft	6	250758-506	171.0mm / 6.73"	450m / 1476 ft	6
250758-504	130.0mm / 5.12"	450m / 1476 ft	6				


8650 – STANDARD RESIN

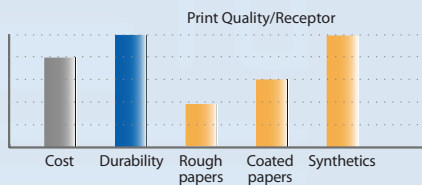

- Adaptable to a wide range of label materials
- Supports high speed printing
- Very high resistance to solvents and abrasion

Part No.	Width	Legnth	Rolls/ctn	Part No.	Width	Legnth	Rolls/ctn
203712-001	60mm / 2.36"	450m / 1476 ft	6	203712-005	152.4mm / 6.00"	450m / 1476 ft	6
203712-002	83mm / 3.27"	450m / 1476 ft	6	204981-006	165.0mm / 6.50"	450m / 1476 ft	6
203712-003	110.0mm / 4.33"	450m / 1476 ft	6	203712-006	171.0mm / 6.73"	450m / 1476 ft	6
203712-004	130.0mm / 5.12"	450m / 1476 ft	6				

8770 – ULTRA DURABLE RESIN

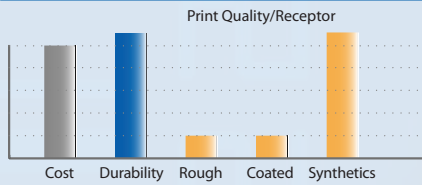

- Developed for extreme environment labeling
- Unmatched scratch and solvent resistance
- Maximum durability

Part No.	Width	Legnth	Rolls/ctn	Part No.	Width	Legnth	Rolls/ctn
179390-001	60mm / 2.36"	450m / 1476 ft	6	179390-005	152.4mm / 6.00"	450m / 1476 ft	6
P140097-001	83mm / 3.27"	450m / 1476 ft	6	179390-018	165.0mm / 6.50"	450m / 1476 ft	6
P140098-001	110.0mm / 4.33"	450m / 1476 ft	6	179390-006	171.0mm / 6.73"	450m / 1476 ft	6
179390-004	130.0mm / 5.12"	450m / 1476 ft	6				