

Thermal Transfer Ribbons for T8000

WAX

WAX/RESIN

RESIN



RIBBONS COMPATIBLE WITH:

- 4" models up to 110mm wide
- 6" models up to 171mm wide
- 8" models up to 220mm wide


9F, No. 95, Minquan Rd. Xindian Dist.,
New Taipei City 231, Taiwan (R.O.C)
Tel: +866 3 990 6155

THERMAL TRANSFER RIBBONS

Supported by a full range of ink formulations, you can be confident that your Genuine Printronix Auto ID ribbon will meet the demands of your label printing application. Enjoy consistent, premium quality and optimized performance through your Printronix Auto ID printer.

The Printronix Auto ID range of thermal transfer ribbons:


8000 – ECONOMY WAX

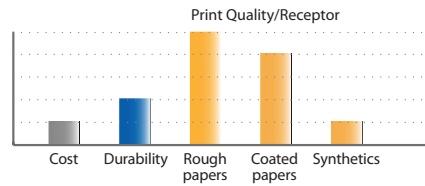

- Our most competitive wax ribbon
- Ideal solution for applications particularly sensitive to the quality/ price ratio
- Compatible with most coated and non-coated paper labels

| Part No. | Width | Legnth | Rolls/ctn | Part No. | Width | Legnth | Rolls/ctn |
|-------------|-----------------|----------------|-----------|-------------|-----------------|----------------|-----------|
| P140089-001 | 60mm / 2.36" | 625m / 1476 ft | 6 | P140093-001 | 152.4mm / 6.00" | 625m / 1476 ft | 6 |
| P140090-001 | 83mm / 3.27" | 625m / 1476 ft | 6 | P140094-001 | 165.0mm / 6.50" | 625m / 1476 ft | 6 |
| P140091-001 | 110.0mm / 4.33" | 625m / 1476 ft | 6 | P140095-001 | 171.0mm / 6.73" | 625m / 1476 ft | 6 |
| P140092-001 | 130.0mm / 5.12" | 625m / 1476 ft | 6 | P140096-001 | 220MM / 8.66" | 625M / 2051ft | 6 |


8050 – STANDARD WAX

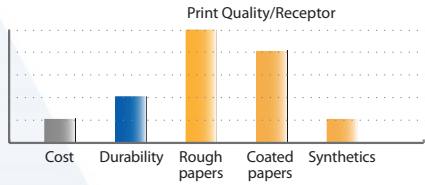

- Widely used for barcode applications
- Provides excellent print quality
- Suitable for standard labeling applications
- Compatible with most coated and non-coated paper labels

| Part No. | Width | Legnth | Rolls/ctn | Part No. | Width | Legnth | Rolls/ctn |
|------------|-----------------|---------------|-----------|------------|-----------------|-------------|-----------|
| 257672-001 | 60mm / 2.36" | 625m / 2051ft | 6 | 257672-005 | 152.4mm / 6.00" | 625m/2051ft | 6 |
| 257672-002 | 83mm / 3.27" | 625m / 2051ft | 6 | 257672-100 | 165.0mm / 6.50" | 625m/2051ft | 6 |
| 257672-003 | 110.0mm / 4.33" | 625m / 2051ft | 6 | 257672-006 | 171.0mm / 6.73" | 625m/2051ft | 6 |
| 257672-004 | 130.0mm / 5.12" | 625m / 2051ft | 6 | 257672-007 | 220.0mm / 8.66" | 625m/2051ft | 6 |


8300 – PREMIUM WIDE SPECTRUM WAX

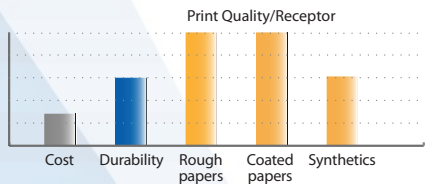

- Resin-enhanced wax
- Best scratch and smudge resistance for a wax ribbon
- Supports high speed printing
- Excellent print quality on all papers and some film materials

| Part No. | Width | Legnth | Rolls/ctn | Part No. | Width | Legnth | Rolls/ctn |
|------------|-----------------|---------------|-----------|------------|-----------------|-------------|-----------|
| 203484-101 | 60mm / 2.36" | 625m / 2051ft | 6 | 203484-105 | 152.4mm / 6.00" | 625m/2051ft | 6 |
| 203484-102 | 83mm / 3.27" | 625m / 2051ft | 6 | 175391-108 | 165.0mm / 6.50" | 625m/2051ft | 6 |
| 203484-103 | 110.0mm / 4.33" | 625m / 2051ft | 6 | 203484-106 | 171.0mm / 6.73" | 625m/2051ft | 6 |
| 203484-104 | 130.0mm / 5.12" | 625m / 2051ft | 6 | 203484-107 | 220.0mm / 8.66" | 625m/2051ft | 6 |


8550 – STANDARD WAX/RESIN

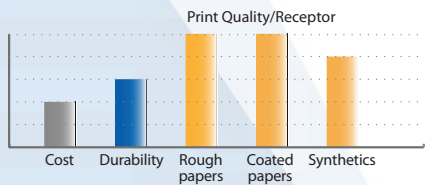

- General purpose wax/resin formulation
- Superior print quality on all common papers and films. Our most versatile formulation
- Prints at low temperatures and high speed

| Part No. | Width | Legnth | Rolls/ctn | Part No. | Width | Legnth | Rolls/ctn |
|------------|-----------------|---------------|-----------|-------------|-----------------|-------------|-----------|
| 203713-101 | 60mm / 2.36" | 625m / 2051ft | 6 | 203713-105 | 152.4mm / 6.00" | 625m/2051ft | 6 |
| 203713-102 | 83mm / 3.27" | 625m / 2051ft | 6 | P140003-001 | 165.0mm / 6.50" | 625m/2051ft | 6 |
| 203713-103 | 110.0mm / 4.33" | 625m / 2051ft | 6 | 203713-106 | 171.0mm / 6.73" | 625m/2051ft | 6 |
| 203713-104 | 130.0mm / 5.12" | 625m / 2051ft | 6 | 203713-107 | 220.0mm / 8.66" | 625m/2051ft | 6 |


8580 – PREMIUM WAX/RESIN

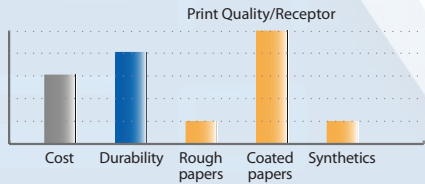

- Designed to print on a wide range of coated papers and films
- Enhanced abrasion and scratch resistance
- Very sharp print quality, enabling ladder and rotated barcode printing simultaneously

| Part No. | Width | Legnth | Rolls/ctn | Part No. | Width | Legnth | Rolls/ctn |
|------------|-----------------|---------------|-----------|-------------|-----------------|-------------|-----------|
| 250758-101 | 60mm / 2.36" | 625m / 2051ft | 6 | 250758-005 | 152.4mm / 6.00" | 625m/2051ft | 6 |
| 250758-002 | 83mm / 3.27" | 625m / 2051ft | 6 | P140004-001 | 165.0mm / 6.50" | 625m/2051ft | 6 |
| 250758-003 | 110.0mm / 4.33" | 625m / 2051ft | 6 | 250758-006 | 171.0mm / 6.73" | 625m/2051ft | 6 |
| 250758-004 | 130.0mm / 5.12" | 625m / 2051ft | 6 | 250758-007 | 220.0mm / 8.66" | 625m/2051ft | 6 |


8650 – STANDARD RESIN

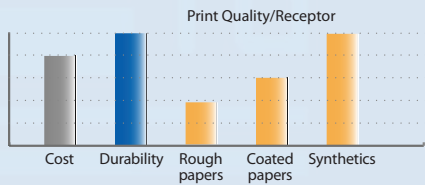

- Adaptable to a wide range of label materials
- Supports high speed printing
- Very high resistance to solvents and abrasion

| Part No. | Width | Legnth | Rolls/ctn | Part No. | Width | Legnth | Rolls/ctn |
|------------|-----------------|---------------|-----------|------------|-----------------|-------------|-----------|
| 203712-101 | 60mm / 2.36" | 625m / 2051ft | 6 | 203712-105 | 152.4mm / 6.00" | 625m/2051ft | 6 |
| 203712-102 | 83mm / 3.27" | 625m / 2051ft | 6 | 204981-106 | 165.0mm / 6.50" | 625m/2051ft | 6 |
| 203712-103 | 110.0mm / 4.33" | 625m / 2051ft | 6 | 203712-106 | 171.0mm / 6.73" | 625m/2051ft | 6 |
| 203712-104 | 130.0mm / 5.12" | 625m / 2051ft | 6 | 203712-107 | 220.0mm / 8.66" | 625m/2051ft | 6 |

8770 – ULTRA DURABLE RESIN

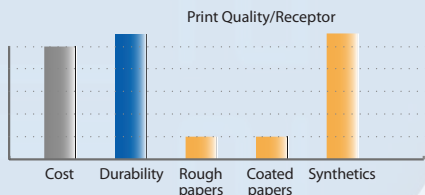

- Developed for extreme environment labeling
- Unmatched scratch and solvent resistance
- Maximum durability

| Part No. | Width | Legnth | Rolls/ctn | Part No. | Width | Legnth | Rolls/ctn |
|------------|-----------------|---------------|-----------|------------|-----------------|-------------|-----------|
| 179390-101 | 60mm / 2.36" | 625m / 2051ft | 6 | 179390-105 | 152.4mm / 6.00" | 625m/2051ft | 6 |
| 179390-102 | 83mm / 3.27" | 625m / 2051ft | 6 | 179390-115 | 165.0mm / 6.50" | 625m/2051ft | 6 |
| 179390-103 | 110.0mm / 4.33" | 625m / 2051ft | 6 | 179390-106 | 171.0mm / 6.73" | 625m/2051ft | 6 |
| 179390-104 | 130.0mm / 5.12" | 625m / 2051ft | 6 | 179390-107 | 220.0mm / 8.66" | 625m/2051ft | 6 |